

# PT

Surface mounted luminaires are designed for mounting on fixed ceiling, can be used as suspended. Luminaire is equipped with electronics and diodes from renowned manufacturers.



Ordering code:: VML 438 PT



## ELECTRICAL FEATURES


Wattage	37 W
Supply voltage	198 - 264 VAC / 190 - 280 VDC
Power factor	0.98
Total harmonic distortion	<10
IEC Protection Class	I
Energy class	A+
Dimming	-
Qty. per MCB C 16A	53 pcs
LED driver lifespan	90 000 hod. @ $t_c=45^\circ$

## OPTICAL FEATURES


Lamp luminous flux	4190 lm
Luminous efficiency	113 lm/W
Color temperature	3K / 4K / 5K
Color rendering index	80+
Chromaticity tolerance	3 step MacAdam
Viewing angle	-
Unified glare rating	16.7/17.9
Luminance @65° < 3000 cd/m <sup>2</sup>	yes
LED lifespan	L80B20 = 110 000 hod.

## MECHANICAL FEATURES


Dimensions	1500 x 135 x 55 mm
Weight	5.1 kg
Operating temperature	- 25 ~ + 25 °C
Protection class	IP 40
Body material	lakovaný Fe plech
Reflector material	Al
Diffuser material	PMMA
Mounting method	přisazená nebo závěsná



## POLAR DIAGRAM

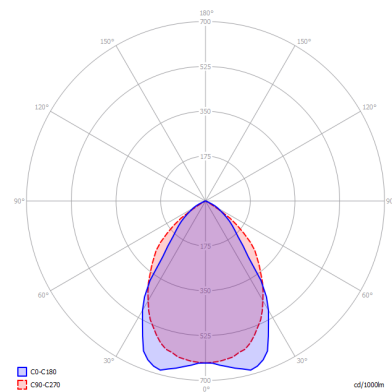

## DIMENSIONS

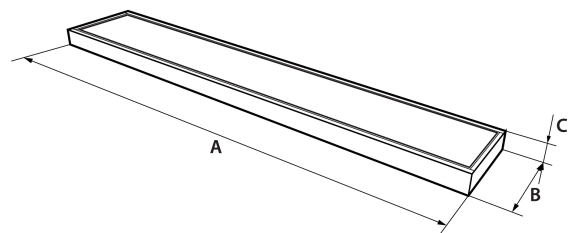

## ON REQUEST

- CCT 2700K, 3500K, 5700K, 6500K
- CRI > 90Ra
- Customized power
- Through wiring
- Customized cable
- Suspension rope kit
- Suspension rope kit (Y type)
- Customized RAL color
- Emergency source 1 hr/3 hrs

Rights to make printing errors, changes in design and lighting specifications are reserved.