

D5/80 P



Ordering code:: VML 120 D5/80 P DALI 25°

ELECTRICAL FEATURES


Wattage	20 W
Supply voltage	198 - 264 VAC / 176 - 280 V DC
Power factor	0.95
Total harmonic distortion	
IEC Protection Class	I
Energy class	A++
Dimming	DALI
Qty. per MCB C 16A	85 pcs
LED driver lifespan	50 000 hod. @ $t_c=45^\circ$

OPTICAL FEATURES


Lamp luminous flux	2710 lm
Luminous efficiency	136 lm/W
Color temperature	3K / 4K / 5K
Color rendering index	80+
Chromaticity tolerance	3 step MacAdam
Viewing angle	25°
Unified glare rating	
Luminance @65° < 3000 cd/m ²	-
LED lifespan	L80B20 = 80 000 hod.

MECHANICAL FEATURES

Dimensions	80 x 240 mm
Weight	1 kg
Operating temperature	- 25 ~ + 25 °C
Protection class	IP 40
Body material	Al profil
Reflector material	PC + Al
Diffuser material	-
Mounting method	surface

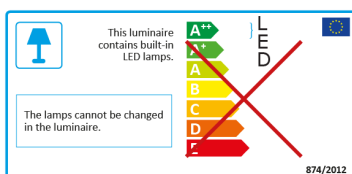

POLAR DIAGRAM

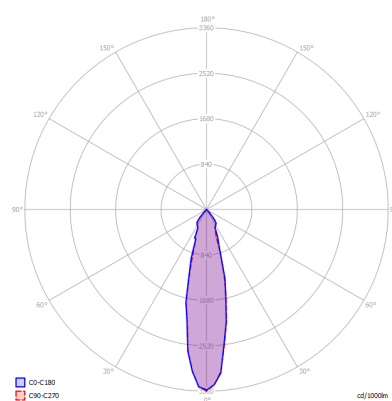

ON REQUEST

CCT 2700K, 3500K, 5700K, 6500K
 CRI > 90Ra
 CRI > 97Ra
 Customized power
 Customized RAL color

Tolerance of data \pm 7.5%

Rights to make printing errors, changes in design and lighting specifications are reserved.

VM elektro s.r.o.
 č.p. 241
 763 01 Machová

vm elektro®

tel: +420 577 102 293-4
 tel: +420 573 034 581-2
 e-mail: info@vmelektro.cz