

PB SPORT



Ordering code:: VML 380 PB SPORT DALI



ELECTRICAL FEATURES

| | |
|---------------------------|-------------------------------|
| Wattage | 80 W |
| Supply voltage | 198 - 264 VAC / 190 - 280 VDC |
| Power factor | 0.98 |
| Total harmonic distortion | <10 |
| IEC Protection Class | I |
| Energy class | A+ |
| Dimming | DALI |
| Qty. per MCB C 16A | pcs |
| LED driver lifespan | 100 000 hod. @ $t_c=65^\circ$ |


OPTICAL FEATURES

| | |
|-----------------------------------------|-----------------------|
| Lamp luminous flux | 7340 lm |
| Luminous efficiency | 92 lm/W |
| Color temperature | 3K / 4K / 5K |
| Color rendering index | 80+ |
| Chromaticity tolerance | 3 step MacAdam |
| Viewing angle | - |
| Unified glare rating | 20.2/21.6 |
| Luminance @65° < 3000 cd/m ² | - |
| LED lifespan | L80B20 = 110 000 hod. |


MECHANICAL FEATURES

| | |
|-----------------------|------------------------|
| Dimensions | 1262 x 265 x 90 mm |
| Weight | 5.5 kg |
| Operating temperature | - 25 ~ + 25 °C |
| Protection class | IP 40 |
| Body material | lakovaný Fe plech |
| Reflector material | Fe |
| Diffuser material | PMMA |
| Mounting method | přisazená nebo závěsná |

POLAR DIAGRAM

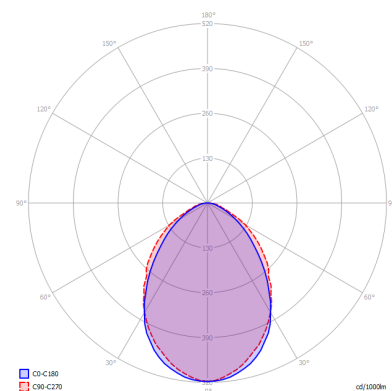

DIMENSIONS

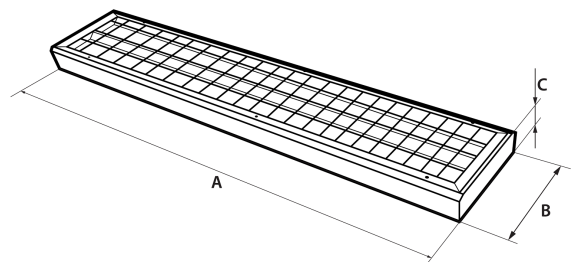

ON REQUEST

CCT 2700K, 3500K, 5700K, 6500K
 CRI > 90Ra
 Customized power
 Customized cable
 Connectors Gesis GST, RST
 Suspension rope kit (Y type)
 Customized RAL color
 Emergency source 1 hr/3 hrs