



Ordering code:: VML 330 AM PC



ELECTRICAL FEATURES

Wattage	30 W
Supply voltage	198 - 264 VAC / 190 - 280 VDC
Power factor	0.98
Total harmonic distortion	<10
IEC Protection Class	I
Energy class	A+
Dimming	-
Qty. per MCB C 16A	53 pcs
LED driver lifespan	100 000 hod. @ $t_c=65^\circ$


OPTICAL FEATURES

Lamp luminous flux	3550 lm
Luminous efficiency	118 lm/W
Color temperature	3K / 4K / 5K
Color rendering index	80+
Chromaticity tolerance	3 step MacAdam
Viewing angle	-
Unified glare rating	23.2/21.4
Luminance @65° < 3000 cd/m ²	-
LED lifespan	$L_{80} / B_{10} = 100\ 000\ \text{hod.} @ 65^\circ\text{C}$

MECHANICAL FEATURES

Dimensions	1277 x 86 x 95 mm
Weight	2.2 kg
Operating temperature	- 25 ~ + 35 °C
Protection class	IP 65
Body material	polyester + glass fiber
Reflector material	-
Diffuser material	PC
Mounting method	přisazená nebo závěsná

POLAR DIAGRAM

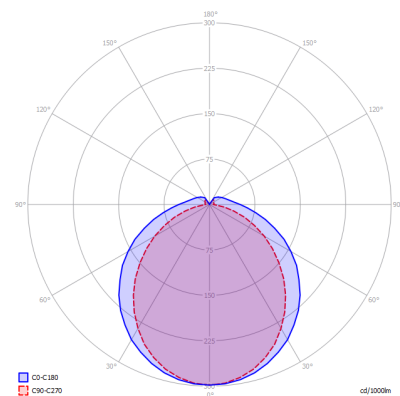

ON REQUEST

- CCT 2700K, 3500K, 5700K, 6500K
- CRI > 90Ra
- Customized power
- Through wiring
- Customized cable
- Connectors Gesis GST, RST
- Emergency source 1 hr/3 hrs