



Ordering code:: VML 440 AM PC DALI



ELECTRICAL FEATURES

| | |
|---------------------------|------------------------------------|
| Wattage | 40 W |
| Supply voltage | 198 - 264 V AC / 190 - 280 V DC |
| Power factor | 0.98 |
| Total harmonic distortion | <10 |
| IEC Protection Class | I |
| Energy class | A++ |
| Dimming | DALI |
| Qty. per MCB C 16A | 53 pcs |
| LED driver lifespan | 100 000 hod. @ t _c =65° |


OPTICAL FEATURES

| | |
|---|---|
| Lamp luminous flux | 4830 lm |
| Luminous efficiency | 121 lm/W |
| Color temperature | 3K / 4K / 5K |
| Color rendering index | 80+ |
| Chromaticity tolerance | 3 step MacAdam |
| Viewing angle | - |
| Unified glare rating | 23.6/21.7 |
| Luminance @65° < 3000 cd/m ² | - |
| LED lifespan | L ₈₀ / B ₁₀ = 100 000 hod. @ 65°C |

MECHANICAL FEATURES

| | |
|-----------------------|-------------------------|
| Dimensions | 1577 x 86 x 95 mm |
| Weight | 2.6 kg |
| Operating temperature | - 25 ~ + 35 °C |
| Protection class | IP 65 |
| Body material | polyester + glass fiber |
| Reflector material | - |
| Diffuser material | PC |
| Mounting method | přisazená nebo závěsná |

POLAR DIAGRAM

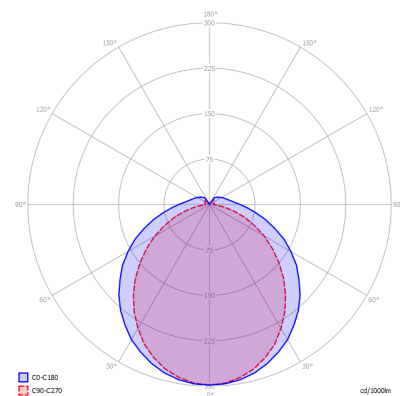

ON REQUEST

- CCT 2700K, 3500K, 5700K, 6500K
- CRI > 90Ra
- Customized power
- Through wiring
- Customized cable
- Connectors Gesis GST, RST
- Emergency source 1 hr/3 hrs