

TQ



Ordering code:: VML 340 TQ DALI

ELECTRICAL FEATURES

Wattage	40 W
Supply voltage	198 - 264 VAC / 190 - 280 VDC
Power factor	0.98
Total harmonic distortion	<10
IEC Protection Class	I
Energy class	A+
Dimming	DALI
Qty. per MCB C 16A	pcs
LED driver lifespan	100 000 hod. @ $t_c=65^\circ$

OPTICAL FEATURES


Lamp luminous flux	3960 lm
Luminous efficiency	99 lm/W
Color temperature	3K / 4K / 5K
Color rendering index	80+
Chromaticity tolerance	3 step MacAdam
Viewing angle	-
Unified glare rating	- / -
Luminance @65° < 3000 cd/m ²	-
LED lifespan	L80B20 = 110 000 hod.

MECHANICAL FEATURES

Dimensions	1000 x 100 x 100 mm
Weight	2.5 kg
Operating temperature	- 10 ~ + 30 °C
Protection class	IP 40
Body material	
Reflector material	-
Diffuser material	PMMA
Mounting method	suspended

ON REQUEST

CCT 2700K, 3500K, 5700K, 6500K
CRI > 90Ra
Customized power
Suspension rope kit
Customized RAL color

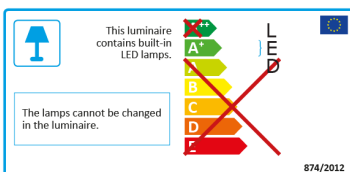

Tolerance of data $\pm 7.5\%$

Rights to make printing errors, changes in design and lighting specifications are reserved.

VM elektro s.r.o.
č.p. 241
763 01 Machová

 VM elektro®

tel: +420 577 102 293-4
tel: +420 573 034 581-2
e-mail: info@vmelektro.cz