

MOK



Ordering code:: VML 119 MOK



ELECTRICAL FEATURES

Wattage	19 W
Supply voltage	198 - 264 VAC / 190 - 280 VDC
Power factor	0.98
Total harmonic distortion	<15
IEC Protection Class	I
Energy class	A+
Dimming	-
Qty. per MCB C 16A	53 pcs
LED driver lifespan	100 000 hod. @ $t_c=65^\circ$

DIMENSIONS



OPTICAL FEATURES


Lamp luminous flux	1740 lm
Luminous efficiency	92 lm/W
Color temperature	3K / 4K / 5K
Color rendering index	80+
Chromaticity tolerance	3 step MacAdam
Viewing angle	-
Unified glare rating	16.3/16.2
Luminance @65° < 3000 cd/m ²	-
LED lifespan	L80B20 = 110 000 hod.

ON REQUEST

CCT 2700K, 3500K, 5700K, 6500K
 CRI > 90Ra
 Customized power
 Through wiring

MECHANICAL FEATURES

Dimensions	640 x 640 x 110 mm
Weight	1.3 kg
Operating temperature	- 25 ~ + 25 °C
Protection class	IP 54
Body material	pozinkovaný Fe plech
Reflector material	-
Diffuser material	PMMA
Mounting method	přisazená nebo závěsná

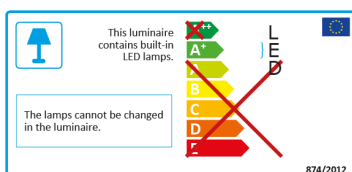

Tolerance of data $\pm 7.5\%$

Rights to make printing errors, changes in design and lighting specifications are reserved.

VM elektro s.r.o.
 č.p. 241
 763 01 Machová

vm elektro®

tel: +420 577 102 293-4
 tel: +420 573 034 581-2
 e-mail: info@vmelektro.cz